


Membrane heat welded to
PVC coated drip flashing

← 2% Slope →

Allow 1/8" gap at butt ends
of PVC coated metal.
Hot air weld 1 1/2" wide
PVC membrane cover strip
at PVC metal gap.

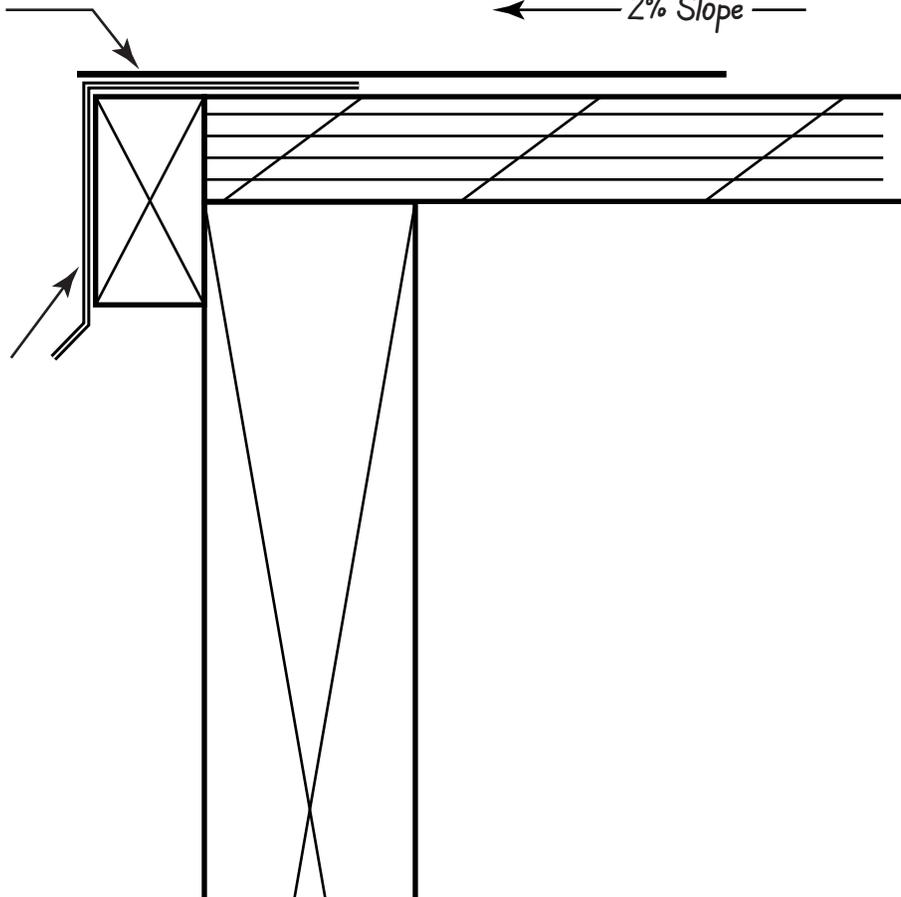

DS-03A

Typical Deck Edge Detail

Outside Perimeter Heat Welded PVC Flashing

Notes:

- Installation to be completed in accordance with Deksmart Vinyl Products specification.
- Minimum slope 3/16":12" away from structure.
- Plywood substrates to be a minimum 5/8" T&G. Plywood joints to be blocked from below.
- Any dimensions shown are approximate. Do not scale drawings.
- As a supplier of finished product only, Deksmart Vinyl Products Ltd does not assume responsibility for errors in engineering, dimensions, or design. The architect, contractor or owner's representative must verify all suitability details.